



Commercial and Architecture

Lighting designer and

Manufacturer

2021-2022

PRODUCTS CATALOG

**DongGuan Emilux Lighting Technology Ltd**

Add: A Building, No.1 GuanHuang north Road, GaoBu Town,  
Dongguan city, Guangdong province, China. 523275

E-mail: [sales@emiluxled.com](mailto:sales@emiluxled.com)



<https://www.emiluxled.com>




# Intelligent life




- 
0~355° 水平旋转  
0~355° Horizontal rotation
- 
0~±85° 垂直旋转  
0~±85° Vertical rotation
- 
15~60° 光束角调节  
15~60° Beam Angle control
- 
亮度调节  
Brightness control
- 
2700~5000K 色温变化  
Color temperature variation between 2700 and 5000K
- 
超远距离遥控 (30m)  
Ultra-far distance remote control (50m)
- 
故障自检  
Breakdown self check
- 
情景模式管理  
Situational mode management
- 
过热保护 (温度超过预设值时, 自动降低功率输出)  
Overheat protection (automatically reduces power output when the temperature exceeds the preset value)

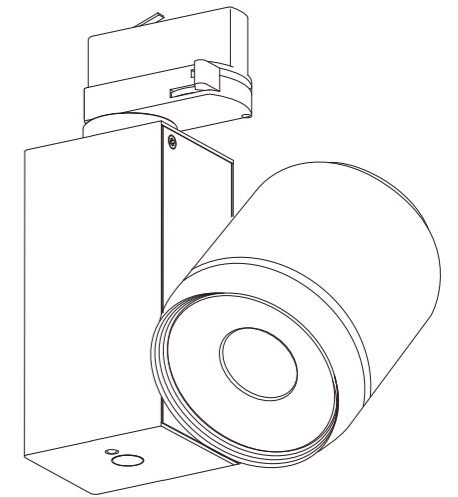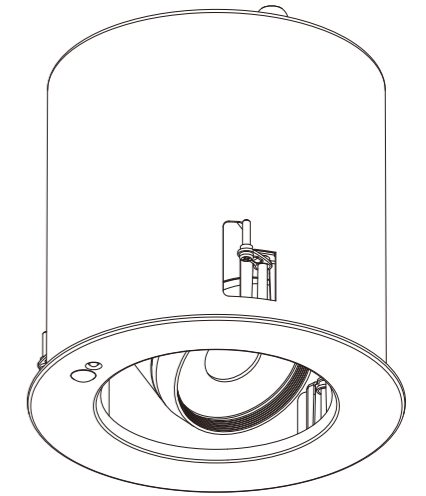


安装方式  
Installation mode

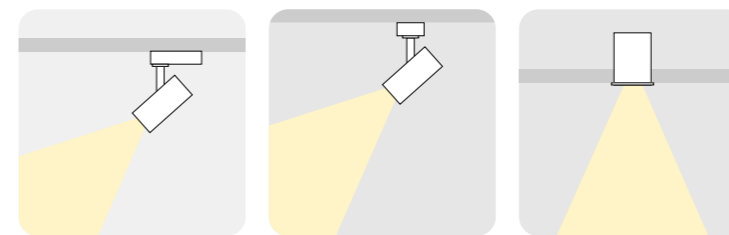

控制方式  
Control mode

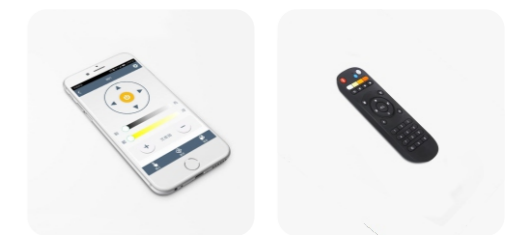


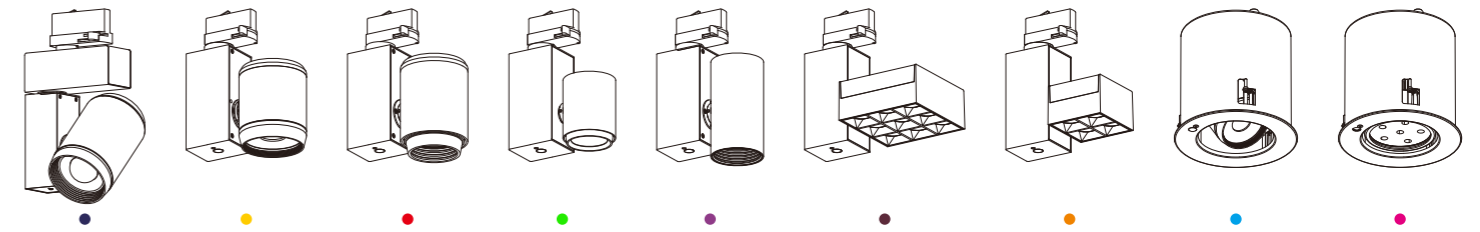


Product code	Power	Beam angle	Color temperature	Input voltage	Fixture size	Cutout size	IP class	CRI
● EM-0220	20	6° 8° 10° 15°	2700K/3000K/4000K	220~240V 50/60Hz	φ 90*150 *252mm	/	IP21	≥90
● EM-0120	20	15°~60°	2700~5000k	220~240V 50/60Hz	φ 90*150 *252mm	/	IP21	≥80
● EM-0230	30	10° 24° 36°	2700K / 3000K / 4000K	220~240V 50/60Hz	φ 90*150 *252mm	/	IP21	≥90
● EM-0130	30	15° ~ 60°	2700K~5000K	220~240V 50/60Hz	φ 90*150 *252mm	/	IP21	≥80
● EM-32	24	8° 10° 24°	2700K / 3000K / 4000K	220~240V 50/60Hz	φ 88*160 *193mm	/	IP21	≥90
● EM-35	24	15° ~ 50°	2700K/3000K/4000K	220~240V 50/60Hz	φ 88*160 *205mm	/	IP21	≥90
● EM-34	12	5°	2700K/3000K/4000K	220~240V 50/60Hz	φ 68*140 *187mm	/	IP21	≥90
● EM-33	20	15° ~50°	2700K/3000K/4000K	220~240V 50/60Hz	φ 68*140 *205mm	/	IP21	≥90
● EM-31	24	15° 24° 36°	2700K/3000K/4000K	220~240V 50/60Hz	54*191 *183mm	/	IP21	≥90
● EM-30	15	15° 24° 36°	2700K/3000K/4000K	220~240V 50/60Hz	54*153 *183mm	/	IP21	≥90
● EML-0512	12	5°	2700K/3000K/4000K	220~240V 50/60Hz	φ 165*205mm	φ 150mm	IP21	≥80
● EML-0520	20	8° 10° 15° 24°	2700K/3000K/4000K	220~240V 50/60Hz	φ 165*205mm	φ 150mm	IP21	≥90
● EML-0220					φ 196*215mm	φ 180mm	IP21	≥90
● EML-0120					φ 196*215mm	φ 180mm	IP21	≥80
● EML-0230	30	8° 10° 15°	2700K / 3000K/4000K	220~240V 50/60Hz	φ 196*215mm	φ 180mm	IP21	≥90
● EML-0330	30	6°	2700K/3000K/4000K	220~240V 50/60Hz	φ 196*215mm	φ 180mm	IP21	≥80

APP功能:  
The APP features:

- 投射方向转动及固定角度设定  
· rotation of projection direction and fixed Angle setting
- 亮度调节  
· brightness adjustment
- 色温调节  
· color temperature adjustment
- 光束角调节  
· beam Angle adjustment
- 四种情景模式设定  
· four scenario mode Settings

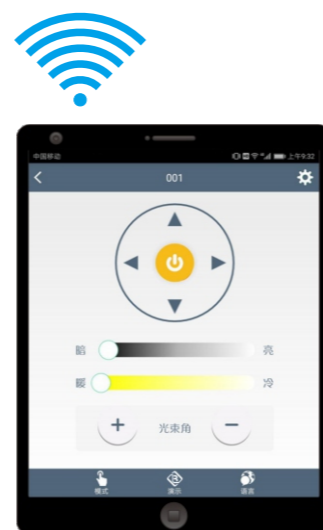


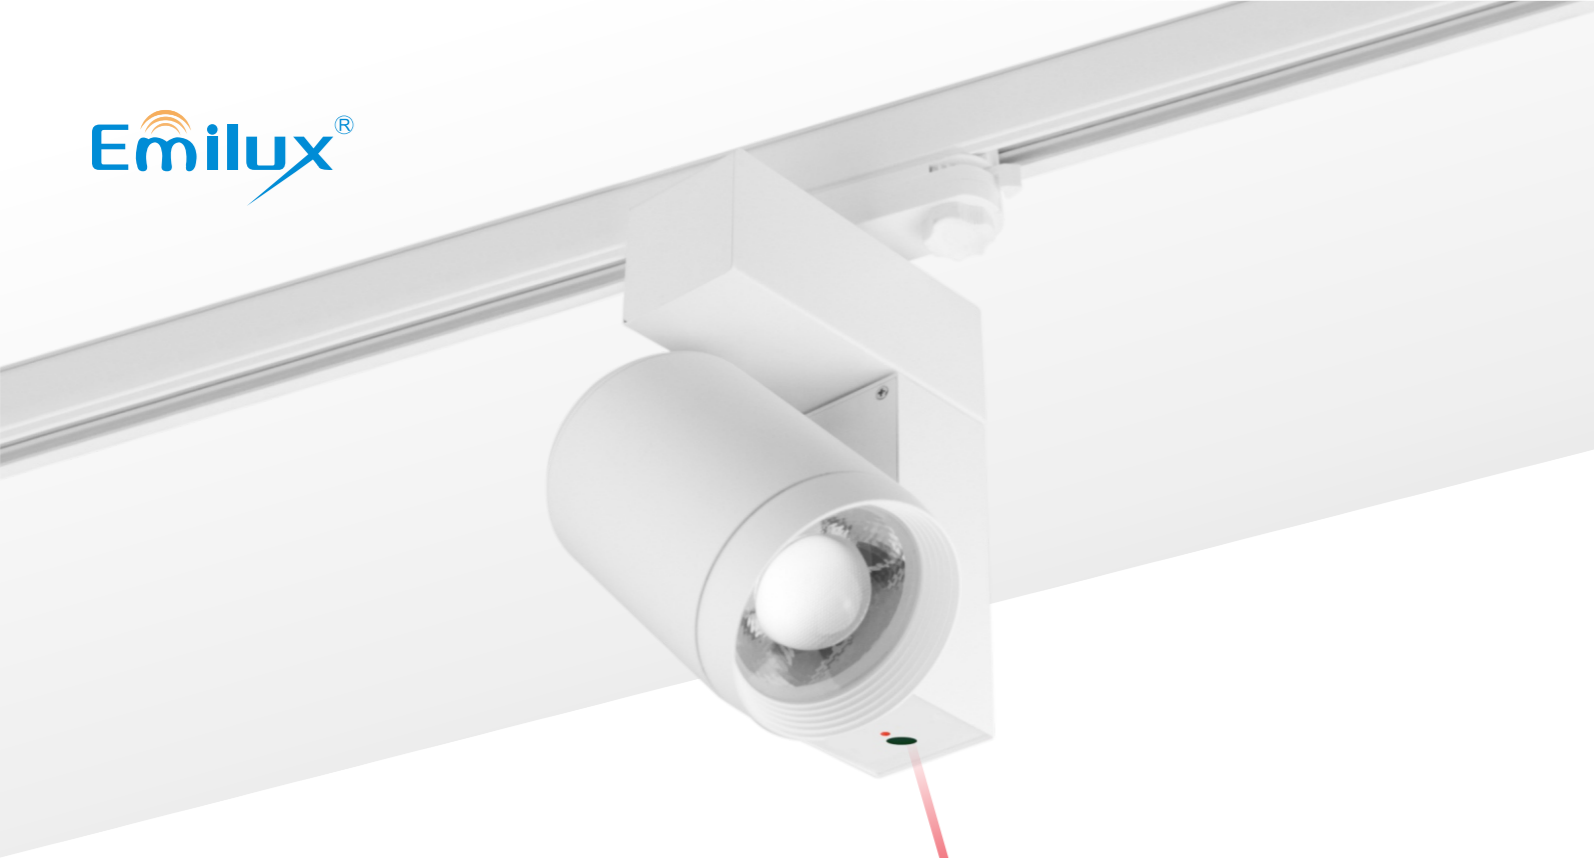

遥控器功能:

Remote control function:

- 激光对码
- Laser pair code
- 灯光投射方向转动调节
- Adjustment of Light Projection Direction Rotation
- 亮度调节
- Brightness adjustment
- 色温调节
- Color temperature regulation
- 光束角调节
- Beam Angle Adjustment
- 单灯、多灯编码联动控制
- Single-lamp and multi-lamp coded linkage control
- 一键复位
- One button reset

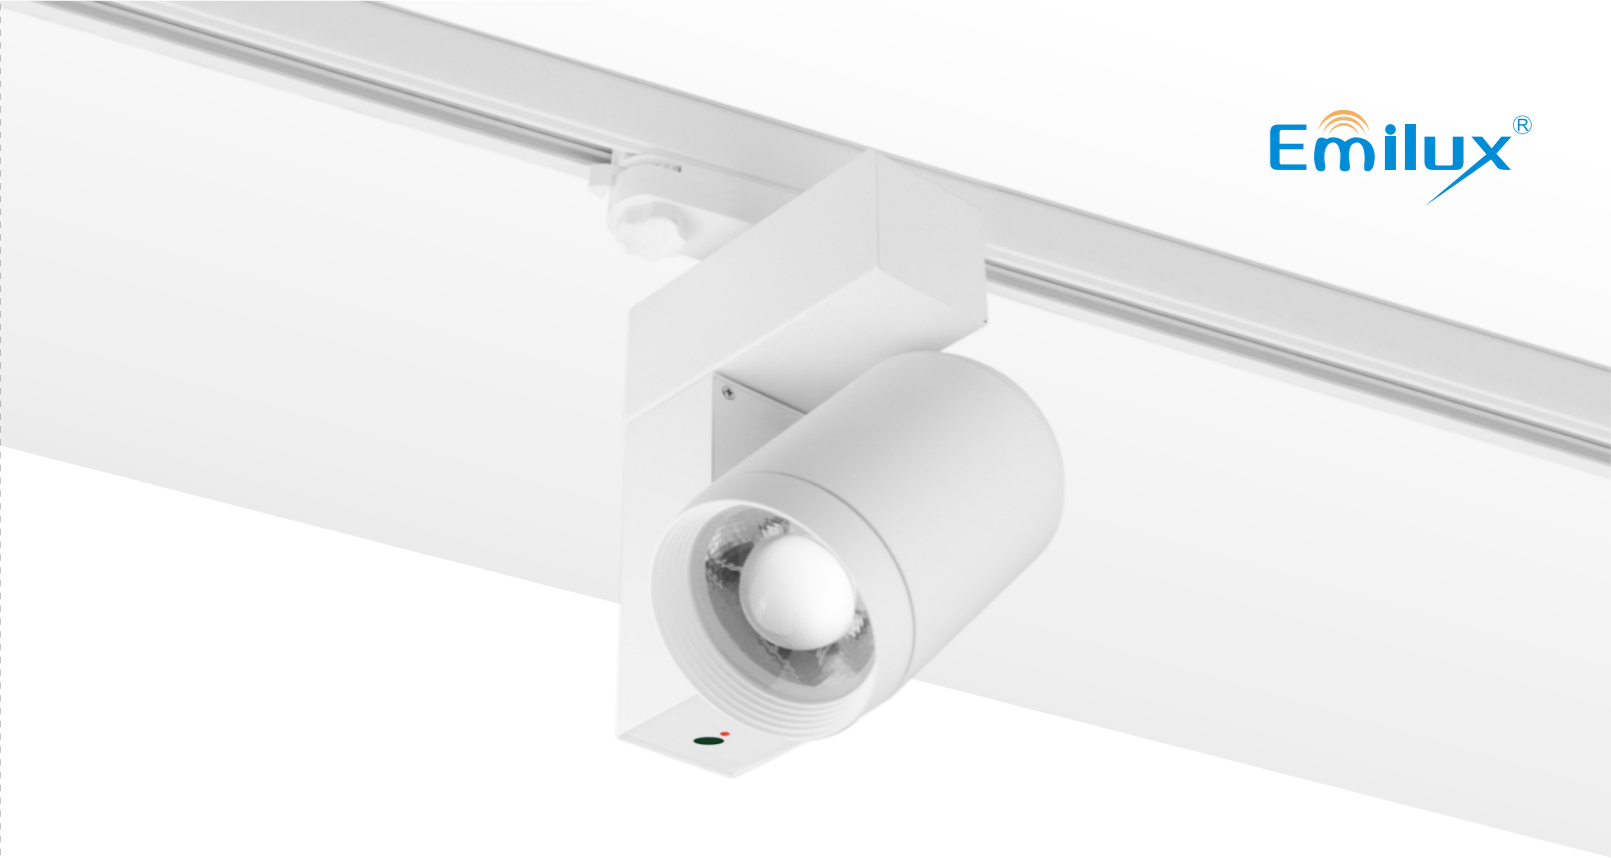

Track Model: **EM-0220**

Power: 20W  
 Lumen: 1890lm  
 Input voltage: AC 220~240V 50/60Hz  
 Beam angle: 6°/8°/10°/15°  
 Color temperature: 2700K /3000K/4000K  
 Surface color: White or Black  
 CRI: ≥90

**EM-0120**



Power: 20W  
 Lumen: 1300lm  
 Input voltage: AC 220~240V 50/60Hz  
 Beam angle: 15°~60° 调节  
 Color temperature: 2700K~5000K 调节  
 Surface color: White or Black  
 CRI: ≥90

**EM-0230**

Power: 30W  
 Lumen: 2256lm  
 Input voltage: AC 220~240V 50/60Hz  
 Beam angle: 10°/24°/36°  
 Color temperature: 2700K /3000K/4000K  
 Surface color: White or Black  
 CRI: ≥90

**EM-0130**





Power: 30W  
 Lumen: 1950lm  
 Input voltage: AC 220~240V 50/60Hz  
 Beam angle: 15°~60° 调节  
 Color temperature: 2700K~5000K 调节  
 Surface color: White or Black  
 CRI: ≥90

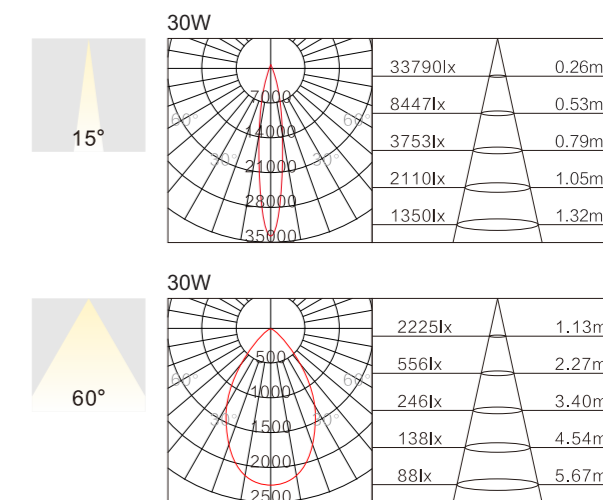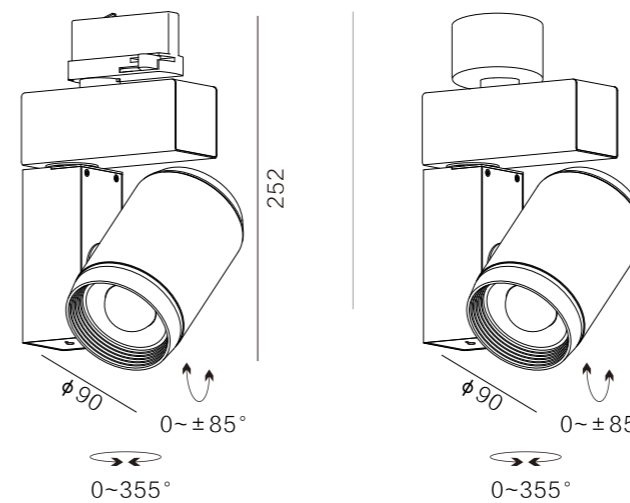






Track Model: **EM-32**

Power: 24W  
 Lumen: 1752lm  
 Input voltage: AC 220~240V 50/60Hz  
 Beam angle: 10°/24°/36°  
 Color temperature: 2700K/3000K/4000K  
 Surface color: White or Black  
 CRI: ≥90

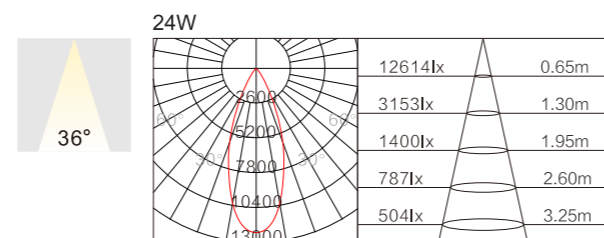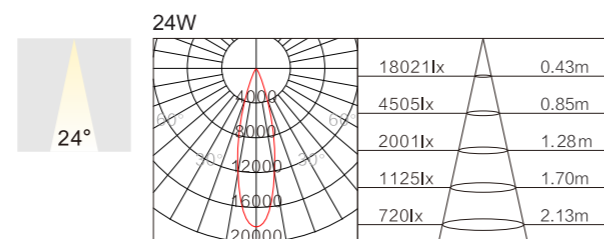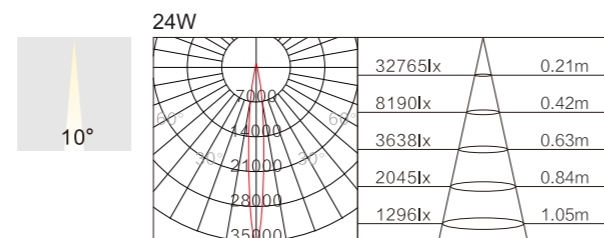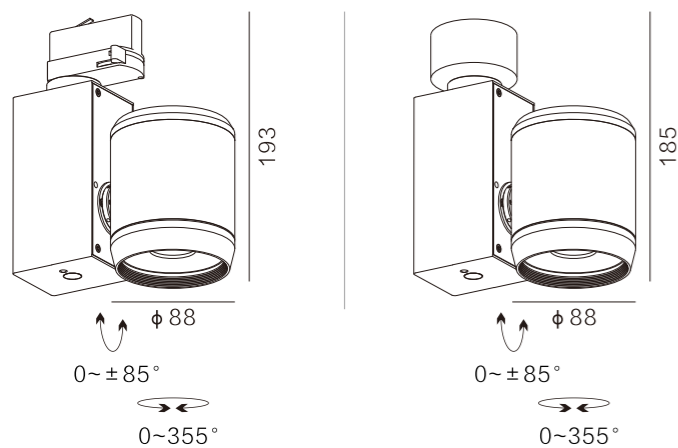

Track Model: **EM-35**


Power: 24W  
 Lumen: 1560lm  
 Input voltage: AC 220~240V 50/60Hz  
 Beam angle: 15°~50° 调节  
 Color temperature: 2700K~5000K 调节  
 Surface color: White or Black  
 CRI: ≥90

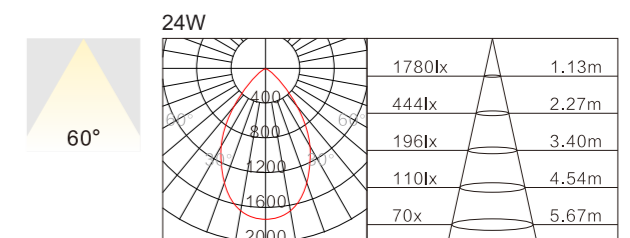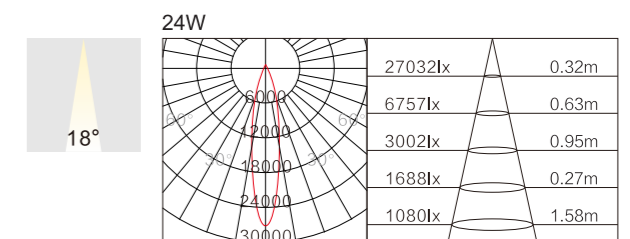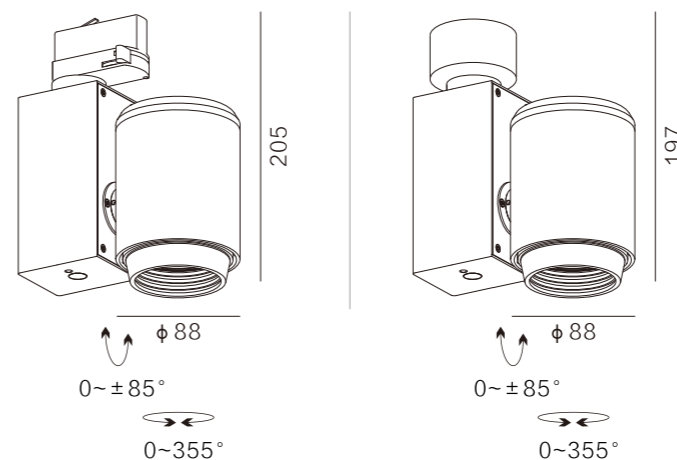







Track Model: **EM-34**

Power: 12W  
 Lumen: 813lm  
 Input voltage: AC 220~240V 50/60Hz  
 Beam angle: 5°  
 Color temperature: 2700K/3000K/4000K  
 Surface color: White or Black  
 CRI: ≥90

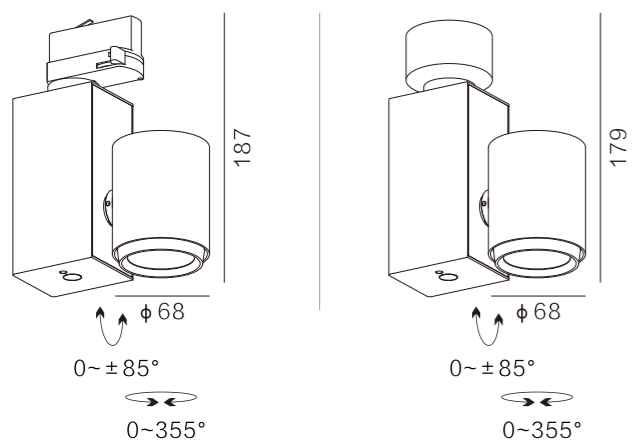

Track Model: **EM-33**



Power: 20W  
 Lumen: 1460lm  
 Input voltage: AC 220~240V 50/60Hz  
 Beam angle: 15°~50° 调节  
 Color temperature: 2700K~5000K 调节  
 Surface color: White or Black  
 CRI: ≥90

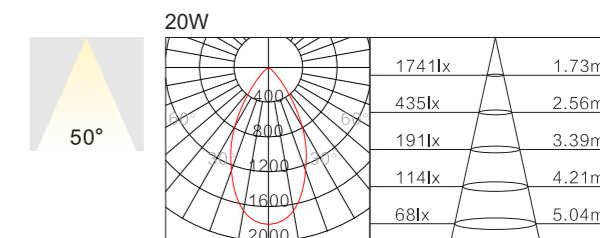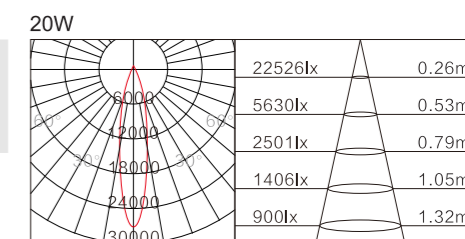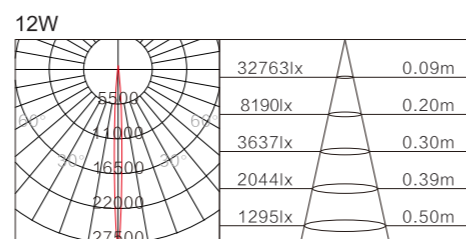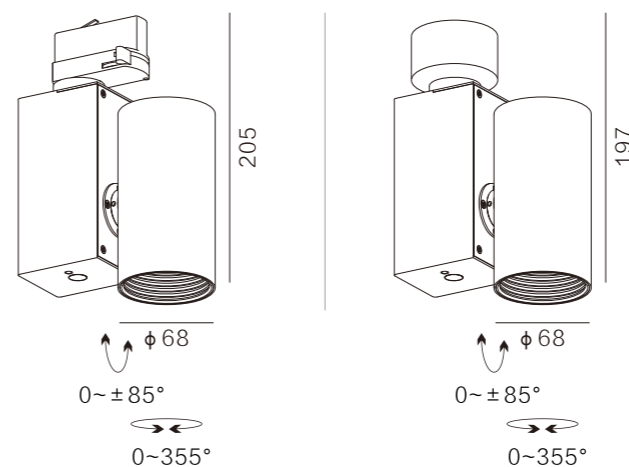





Track Model: **EM-31**

Power: 24W  
 Lumen: 1752lm  
 Input voltage: AC 220~240V 50/60Hz  
 Beam angle: 15°/24°/36°  
 Color temperature: 2700K/3000K/4000K  
 Surface color: White or Black  
 CRI: ≥90

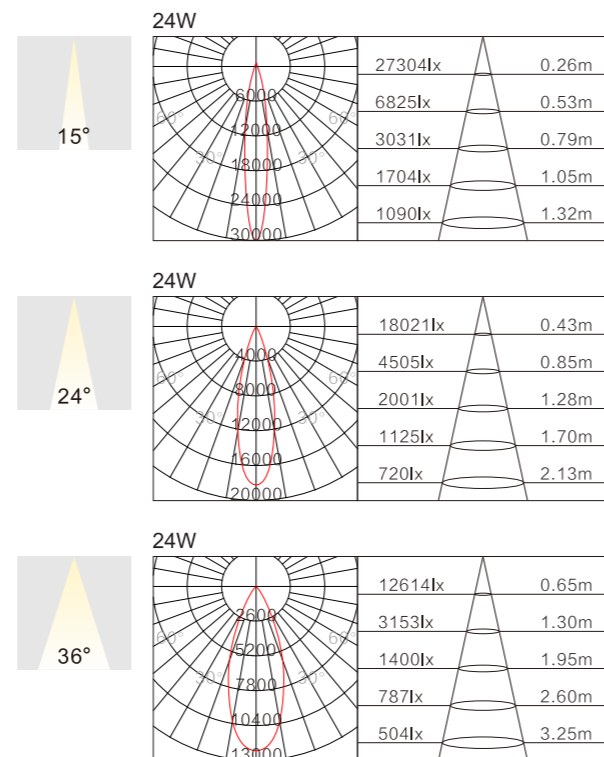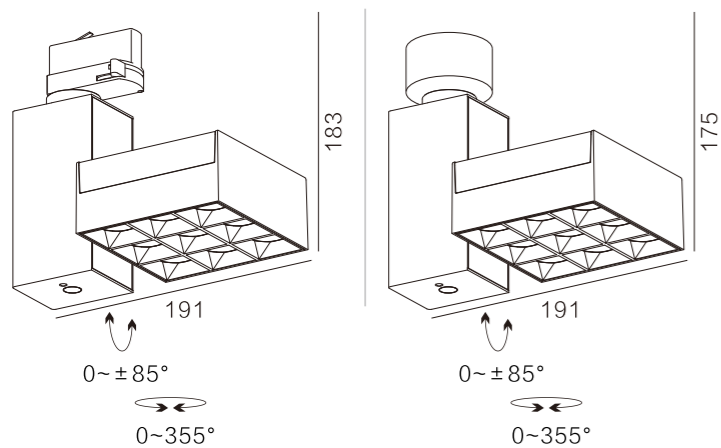

Track Model: **EM-30**

Power: 15W  
 Lumen: 876lm  
 Input voltage: AC 220~240V 50/60Hz  
 Beam angle: 15°/24°/36°  
 Color temperature: 2700K/3000K/4000K  
 Surface color: White or Black  
 CRI: ≥90

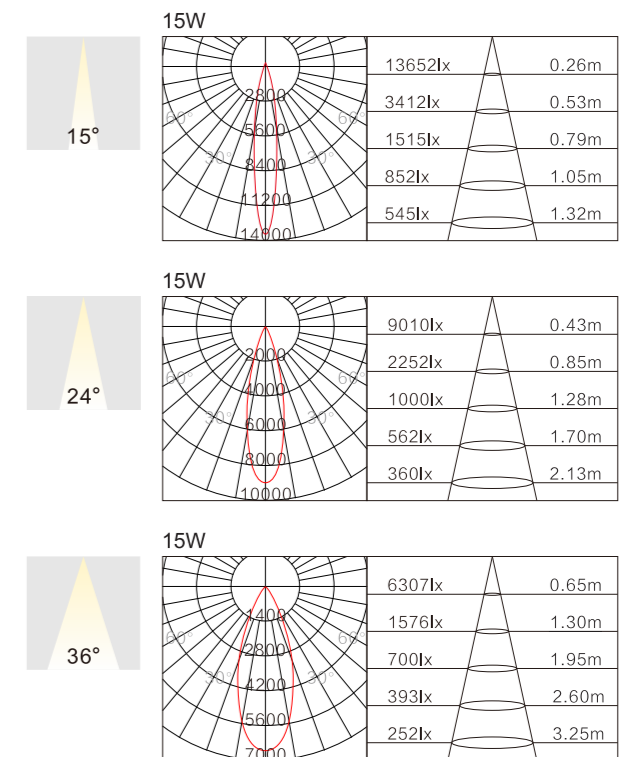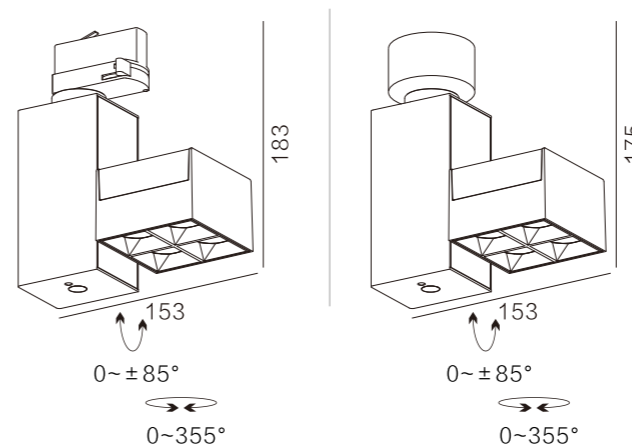



Model: **EML-0520**

Power: 20W

Lumen: 1890lm


Input voltage: AC 220~240V 50/60Hz

Beam angle: 8°/10°/15°/24°

Color temperature: 2700K/3000K/4000K

Surface color: White or Black

CRI: ≥90

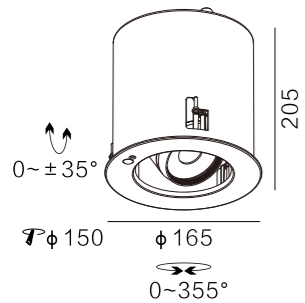

**EML-0512**

12W

813lm




AC 220~240V 50/60Hz

5°

2700K/3000K/4000K

White or Black

≥90

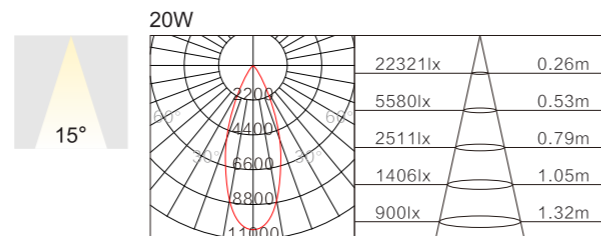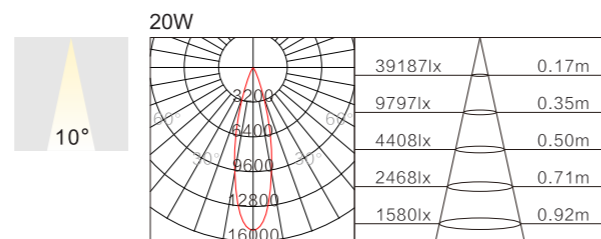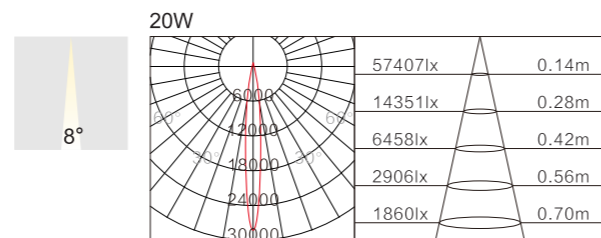

Model: **EML-0220**

Power: 20W

Lumen: 1890lm


Input voltage: AC 220~240V 50/60Hz

Beam angle: 8°/10°/15°/24°

Color temperature: 2700K~5000K

Surface color: White or Black

CRI: ≥90

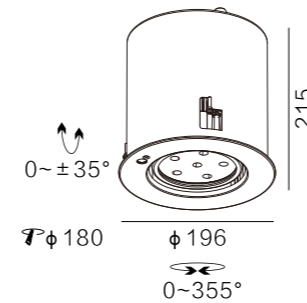

**EML-0120**

20W

1300lm


AC 220~240V 50/60Hz

15~60° 调节

2700K~5000K 调节

White or Black

≥90

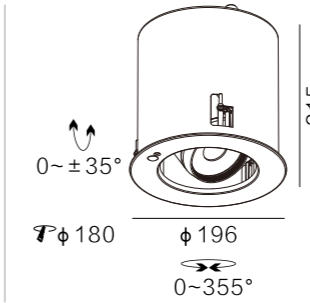

**EML-0230**

30W

2256lm



AC 220~240V 50/60Hz

10°/15°/24°

2700K/3000K/4000K

White or Black

≥90

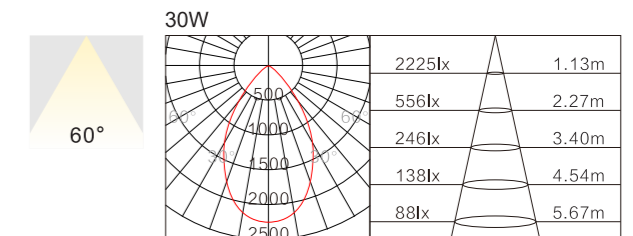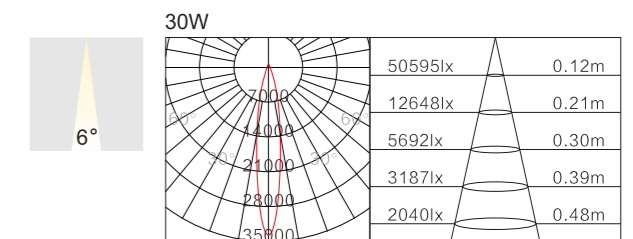

**EML-0330**

30W

1950lm

AC 220~240V 50/60Hz

6°

2700K/3000K/4000K


White or Black

≥90







15°~50°

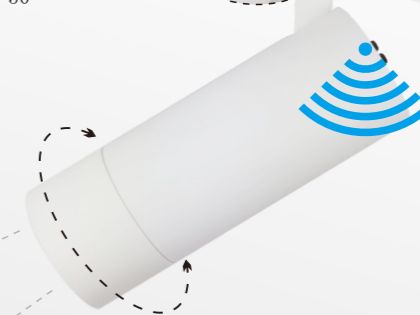

2700-5000K  
5%-100%  
15°~50°

Track Model: **EM-15**

Power: Max.24W  
Lumen: Max.1704lm  
Input voltage: AC 220~240V 50/60Hz  
Beam angle: 15°~50°  
Color temperature: 2700K/3000K/4000K  
Surface color: White or Black  
CRI: ≥90

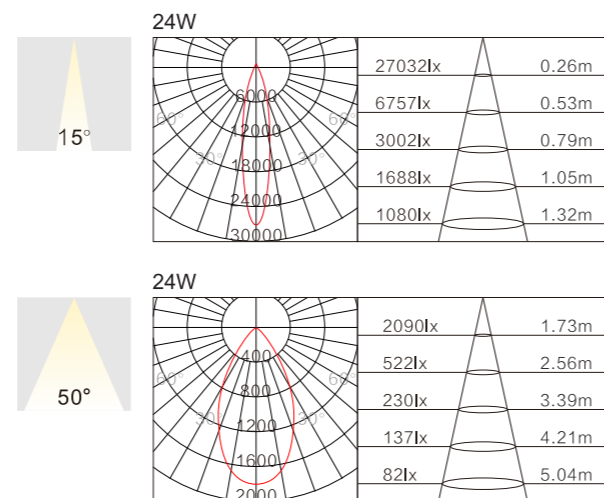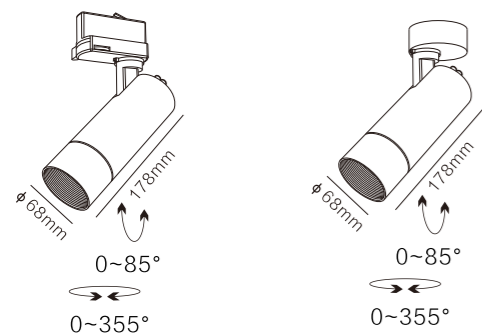

Track Model: **EM-51**

Power: Max.24W  
Lumen: Max.1704lm  
Input voltage: AC 220~240V 50/60Hz  
Beam angle: 15°~50°  
Color temperature: 2700K~5000K  
Surface color: White or Black  
CRI: ≥90

